
SIEMENS

iQ700, Induction hob, 60 cm, Black, EX675LYC5I







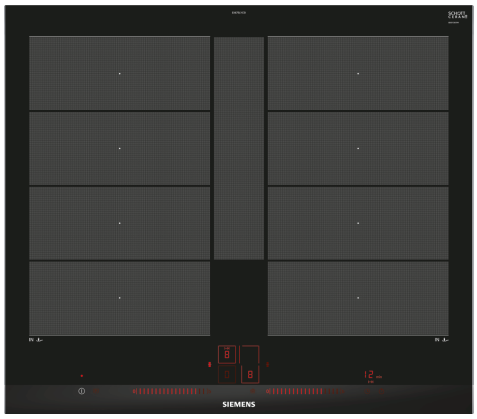





Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ flexInduction Plus – Smart, extendable cooking zone adapts to your cookware
- ✓ Dual lightSlider lets you easily and intuitively operate the hob.
- ✓ fryingSensor Plus – No more burning or scorching your meals.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ Remembers the heat settings for individual pans while moving them freely across the hob – flexMotion.

HZ9FF010 Flex Pan, large, HZ9FF030 Flex Pan set, 3 pcs., HZ9FF040 Flex Pan set, 4 pcs., HZ9SE040 4 pieces Set, HZ9SE060 6 pieces Set, HZ9TY010 Teppan Yaki, HZ390011 Stainless Steel roaster with glas lid, HZ390012 Steaming Rack for Stainless Steel roaste, HZ390210 System pan diameter 15 cm, HZ390220 System pan diameter 19 cm, HZ390230 System pan diameter 21cm, HZ390250 System pan diameter 28 cm, HZ390512 Teppan Yaki (large), HZ390522 Griddle Plate, HZ394301 Connecting strip, HZ9CF240 Fry pan, coated 24cm Ø, HZ9CF280 Fry pan, coated 28cm Ø, HZ9ES100 Espresso maker 4 cups, HZ9FE280 Iron pan Ø 18 / 28 cm

Product name/family: ..... Cooking zone ceramic
Built-in / Free-standing: ..... Built-in
Energy input: ..... Electric
Total number of positions that can be used at the same time: 4
Min. required niche size for installation (HxWxD): ....51 x 560-560 x 490-500 mm
Width of the appliance: ..... 602 mm
Dimensions: ..... 51x602x520 mm
Dimensions of the packed product (HxWxD): ... 126 x 753 x 608 mm
Net weight: ..... 13.7 kg
Gross weight: ..... 16.0 kg
Residual heat indicator: ..... Separate
Location of control panel: ..... Front
Basic surface material: ..... Ceramic
Color of surface: ..... Black, Alu, brushed
Length electrical supply cord: ..... 110.0 cm
Sealed Burners: ..... No
Heating with booster: ..... All
Power of 2nd heating element (kW): ..... 3.3 kW
Power of heating element (kW in boost): .....[3.7] kW
Power of 6th heating element (kW in boost): ..... 3.7 kW
Connection Rating: ..... 7400 W
Voltage: .....220-240 V
Frequency: .....50 Hz
Energy input: .....Electric
Plug type: ..... No plug
Appliance Dimensions (h x w x d) (in): ..... x x
Dimensions of the packed product: ..... 4.96 x 23.93 x 29.64
Net weight: ..... 30.000 lbs
Gross weight: ..... 35.000 lbs
Total number of positions that can be used at the same time: 4
Length electrical supply cord: ..... 110.0 cm
Min. required niche size for installation (HxWxD): ....51 x 560-560 x 490-500 mm
Dimensions: ..... 51x602x520 mm
Dimensions of the packed product (HxWxD): ... 126 x 753 x 608 mm
Net weight: ..... 13.7 kg
Gross weight: ..... 16.0 kg

4 242003 853924

iQ700, Induction hob, 60 cm, Black, EX675LYC5I

Power and size

- 4 induction cooking zones
- Cooking zones:
- 1 x Ø380 mmx225 mm, 3.3 KW (max. Power level 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power level 3.7 KW) Induction;
- 1 x Ø380 mmx225 mm, 3.3 KW (max. Power level 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power level 3.7 KW) Induction
- 17 power levels

Design

- Stainless steel facetted design with front facette and side profiles
- 2 Flex zones /w aux. induct.

Features:


- Dual LightSlider
- flexMotion
- powerMove Plus
- Energy efficiency display
- fryingSensor Plus with 5 temperature settings
- 2 x 4 vector + 1 aux
- Timer with switch-off function for all zones
- Count down function count-up timer, per cooktop
- Automatic pan recognition
- power management function Automatic safety switch off Safety lock Wipe protection function
- ReStart Function
- QuickStart Function
- Two stage residual heat indicators
- Boost function for all zones
- Residual heat indicator for each zone
- Main switch


Dimensions:

- Can be combined with all hobs in comfort design
- Installation measurements: 560 mmx490 mm
- Total Connected load: 7.4 KW
- Length wire connection: 110 cm
- loose insert in packaging
- Min. worktop thickness: 16 mm

SIEMENS

iQ700, Induction hob, 60 cm, Black, EX675LYC5I

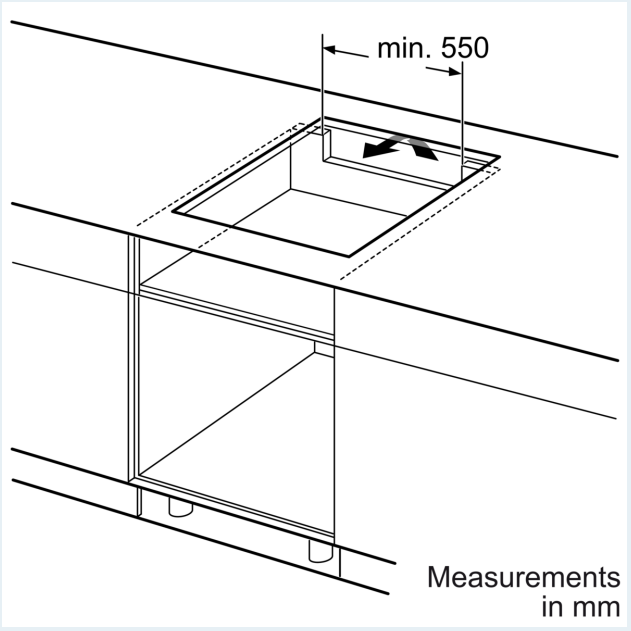

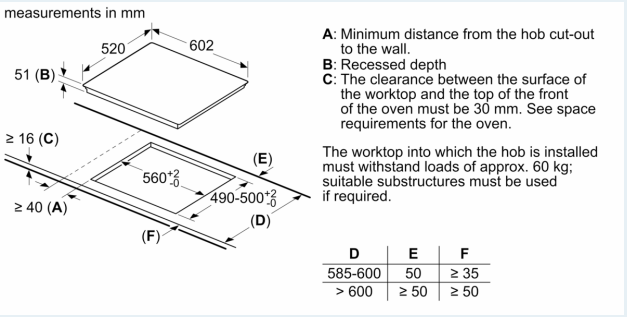

A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

