
SIEMENS

iQ700, Induction hob with integrated ventilation system, 80 cm, surface mount with frame EX875LX67E



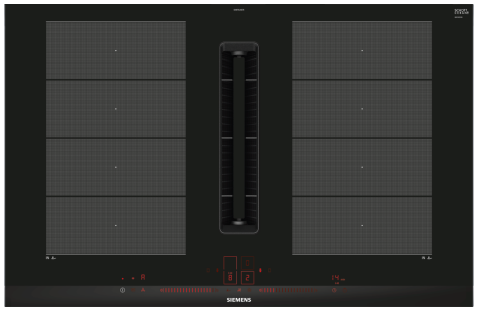

✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.

Accessories

1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

Optional accessories

HZ32WA00 Wireless food thermometer, HZ390011 Stainless Steel roaster with glas lid, HZ390012 Steaming Rack for Stainless Steel roaste, HZ390090 Wok Set consisting of 3 Items, HZ390210 System pan diameter 15 cm, HZ390220 System pan diameter 19 cm, HZ390230 System pan diameter 21cm, HZ39050 Wireless temperature sensor for cooktop, HZ390512 Teppan Yaki (large), HZ390522 Griddle Plate, HZ9CF240 Fry pan, coated 24cm Ø, HZ9CF280 Fry pan, coated 28cm Ø, HZ9FE280 Iron pan Ø 18 / 28 cm, HZ9FF010 Flex Pan, large, HZ9FF030 Flex Pan set, 3 pcs., HZ9FF040 Flex Pan set, 4 pcs., HZ9SE030 Set of 2 pots and 1 pan, HZ9SE040 4 pieces Set, HZ9SE060 6 pieces Set, HZ9TY010 Teppan Yaki, HZ9VDKE1 Exhaust kit, HZ9VDKR0 Recirculation kit 2 L-bow (70cm), HZ9VDKR1 Recirculation kit S and L-bow (60cm), HZ9VDKR2 Recirculation kit 1x L-bow, HZ9VDSB1 90° flat duct bend horizontal, HZ9VDSB2 90° flat duct L vertical, HZ9VDSB3 90° flat duct M vertical, HZ9VDSB4 90° flat duct S vertical, HZ9VDSI0 Adapter round-flat, HZ9VDSI1 90° Adapter round-flat, HZ9VDSM1 Straight tube 500mm, HZ9VDSM2 Straight tube 1000mm, HZ9VDSS1 Connector sleeve (female), HZ9VDSS2 Flexibel connecting piece DN 150 flat, HZ9VEDU0 Acoustics Filter, HZ9VRCR0 cleanAir recirculation replenishment fil, HZ9VRCR1 Clean Air Plus odor filter (replacement), HZ9VRPD1 Plinth Diffusor

Technical data


Product name/family: ..... Cooking zone ceramic
Built-in / Free-standing: ..... Built-in
Energy input: ..... Electric
Min. required niche size for installation (HxWxD): ..223 x 750-750 x 490-490 mm
Width of the appliance: ..... 812 mm
Dimensions: ..... 223x812x520 mm
Dimensions of the packed product (HxWxD): ... 430 x 950 x 660 mm
Net weight: ..... 27.2 kg
Gross weight: ..... 33.6 kg
Residual heat indicator: ..... Separate
Location of control panel: ..... Front
Basic surface material: ..... Ceramic
Color of surface: ..... Black, Stainless steel
Color of frame: ..... Stainless steel
Length electrical supply cord: ..... 110.0 cm
Sealed Burners: ..... No
Heating with booster: ..... All
Power of 2nd heating element (kW): ..... 3.3 kW
Maximum output air extraction: ..... 500 m³/h
Boost position output recirculating: ..... 595.0 m³/h
Maximum output recirculating air: ..... 499 m³/h
Boost position air extraction: ..... 622 m³/h
Noise level: ..... 69 dB(A) re 1pW
Odour filter: ..... No
Air circulation: ..... Convertible
Voltage: ..... 220-240/380-415 V
Frequency: ..... 50-60 Hz
Included accessories: ..... 1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

4 242003 867198


SIEMENS

iQ700, Induction hob with integrated ventilation system, 80 cm, surface mount with frame EX875LX67E

measurements in mm

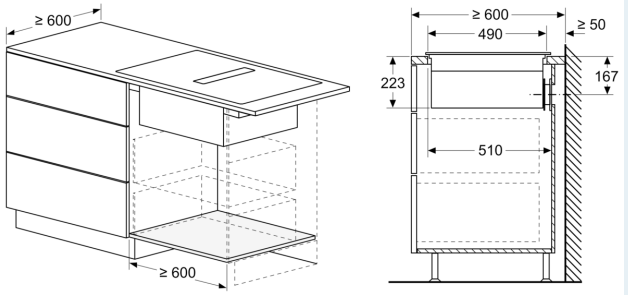


measurements in mm

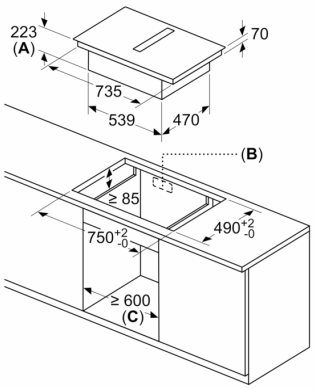

A: Recess depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80 cm width class models can be installed in 60 cm wide furniture by adjusting the side panels.

Measurements in mm

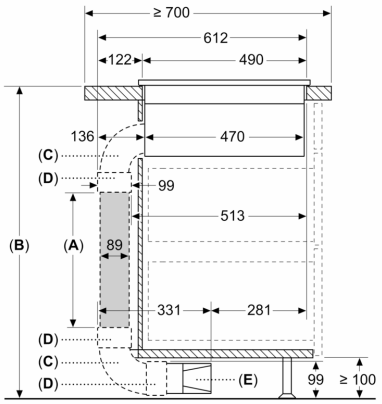


A: Tube length
B: Kitchen height
C: 90° L-size bow
D: Connector sleeve
E: Diffusor

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 960
1000	> 960

Measurements in mm

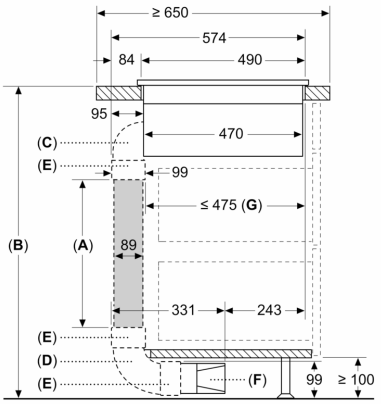


A: Tube length
B: Kitchen height
C: 90° M-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 940
1000	> 940

SIEMENS

Measurements in mm

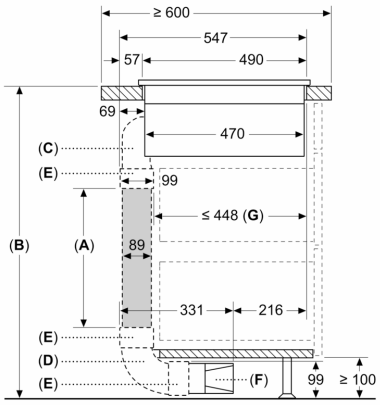


A: Tube length
B: Kitchen height
C: 90° S-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

Ducting kit available for ≥ 600 mm depth worktops and up to 960 mm height


The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 990
1000	> 990


measurements in mm

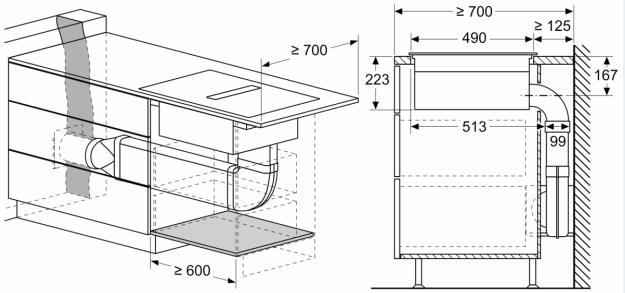


measurements in mm

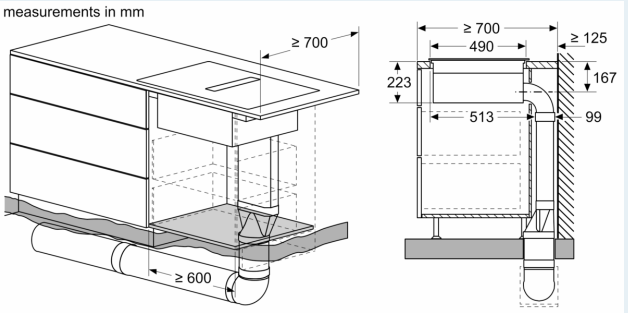


measurements in mm

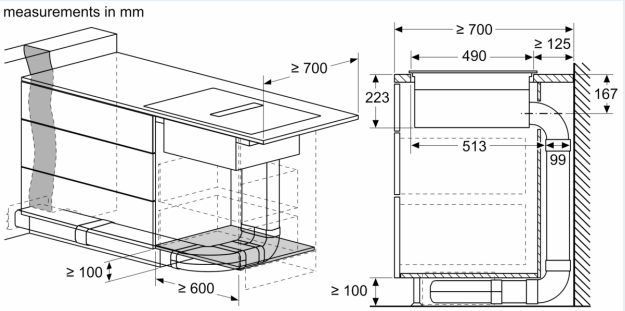

measurements in mm

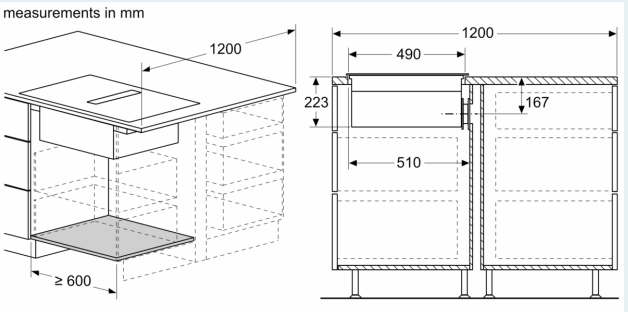


measurements in mm

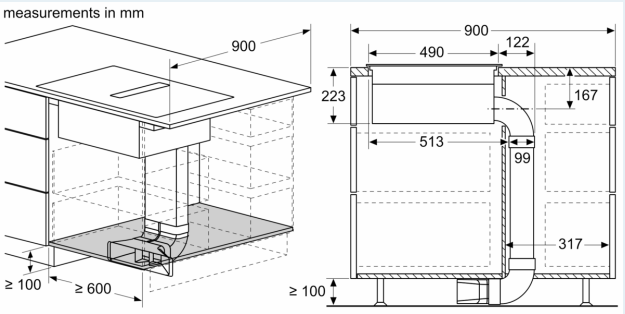

SIEMENS


Measurements in mm

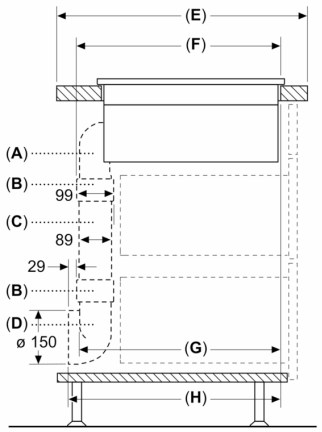

A	E	F	G	H
S-size	≥ 600	547	545	579
M-size	≥ 650	574	569	603
L-size	≥ 700	612	609	643

A: 90° Bow
B: Connector sleeve
C: Straight tube
D: 90° Adapter round–flat


Measurements in mm

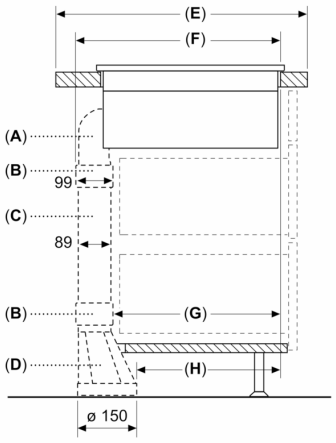

A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453


A: 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

measurements in mm

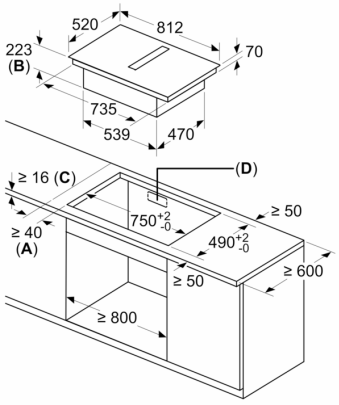

A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.


measurements in mm
Front view

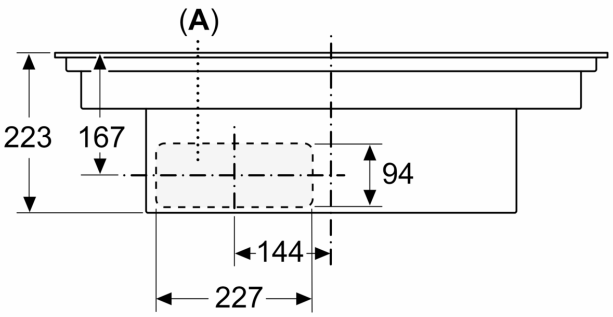


A: Connected directly at the rear

SIEMENS

measurements in mm
Front view – unit cut-out
for unducted recirculation

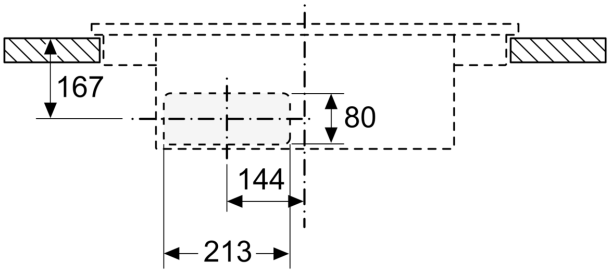

measurements in mm
Side view



When installing directly against outer walls that are not insulated (μ ≥ 0.5 W/m²°C), we recommend using partially or fully ducted recirculation configurations.

measurements in mm
Front view

