iQ300, telescopic cooker hood, 90 cm, Silver metallic
LI97SA531I





LZ10ITP00	Long Life odor filter (replacement)
LZ11ITD11	Long Life recirculation kit external
LZ11IXB16	Clean Air Plus odor filter (replacement)
LZ11IXC16	Clean Air Plus recirc. kit external
LZ12ITB14	Clean Air Standard odor filter (repl.)
LZ12ITI14	Clean Air Standard recirculation kit
LZ49200	Installation kit for 90cm wide wall unit
LZ49521	Handle strip white
LZ49561	Handle strip black
LZ49601	Lowering frame
LZ49850	Handle strip

The telescopic cooker hood: practically disappears into your upper cabinet, giving you a sleek kitchen front.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ LED light: Optimal visibility and atmosphere when cooking.
- ✓ Pleasantly quiet - motor.
- ✓ Intensive setting with automatic after revert setting
- ✓ Pleasantly quiet - motor

Typology: ..... Pull-out
Length electrical supply cord: ..... 175.0 cm
Min. required niche size for installation (HxWxD): ..... 385mm x 524.0mm x 290mm mm
Net weight: ..... 12.2 kg
Type of control: ..... Electronic
Number of speed settings: ..... 3-stages + intensive setting
Maximum output air extraction: ..... 397 m³/h
Boost position output recirculating: ..... 628 m³/h
Maximum output recirculating air: ..... 358 m³/h
Boost position air extraction: ..... 729 m³/h
Number of lights: 3
Noise level: ..... 53 dB(A) re 1pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable stainless steel
Odour filter: ..... No
Air circulation: ..... Convertible
Optional accessories: LZ10ITP00, LZ11ITD11, LZ11IXB16, LZ11IXC16, LZ12ITB14, LZ12ITI14, LZ49200, LZ49521, LZ49561, LZ49601, LZ49850
Type of lamps used: ..... LED
Total power of the lamps: ..... 6 W
Grease filter type: ..... Multilayer cassette
Connection Rating: ..... 146 W
Fuse protection: ..... 16 A
Voltage: ..... 220-240 V
Frequency: ..... 60; 50 Hz
Plug type: ..... India plug (16 Ampere)
Type: ..... Built-in into the cabinet
Material body: ..... zinc plated
Plug type: ..... India plug (16 Ampere)
Dimensions of the product, with chimney (if exists) (in): ..... x x
Dimensions of the packed product: ..... 15.74 x 37.00 x 19.29
Net weight: ..... 27.000 lbs
Gross weight: ..... 33.000 lbs
Motor location: ..... Integrated motor in hood body
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 175.0 cm
Dimensions of the product, with chimney (if exists): ..426 x 898.0 x 290.0 mm
Dimensions of the packed product (HxWxD): ... 400 x 940 x 490 mm
Net weight: ..... 12.2 kg
Gross weight: ..... 15.1 kg

4 242003 890196

SIEMENS

iQ300, telescopic cooker hood, 90 cm, Silver metallic
LI97SA531I

Variant
- LI97SA531I silver metallic lacquer
- For installation into a 60cm or 90cm wide cupboard

Design
- silver metallic lacquer Standard
- Push button with LED
- Steel filter cover, dishwasher safe


Technical information
- 3 x power levels plus intensive setting
- Maximum extraction power 415 m³/h (freeblowing)
- 3 x LM3-01_LED_1,5W
- Suitable for ducted and re-circulating operation only
- Recirculation kit or clean air kit

Comfort
- Noise min./max. Normal Level: 41/53 dB
- Light Intensity: 355 lux
- Colour Temperature: 3500 K

Dimensions:
- 90 cm silver metallic lacquer Standard hood
- Dimensions exhaust air (HxWxD): 426-426 x 898 x 290 mm
- Dimensions recirculating (HxWxD): 426-426 x 898 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)


SIEMENS

iQ300, telescopic cooker hood, 90 cm, Silver metallic
LI97SA531I

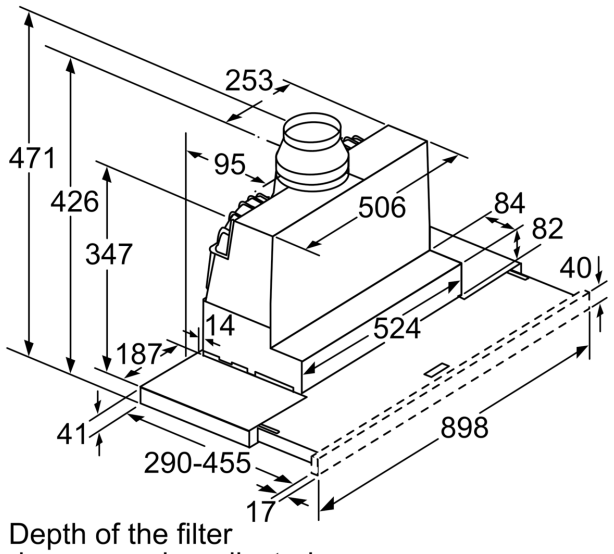


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

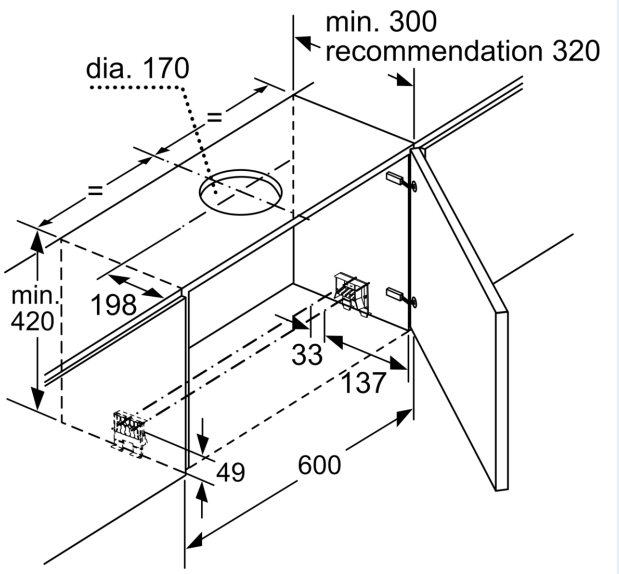


measurements in mm

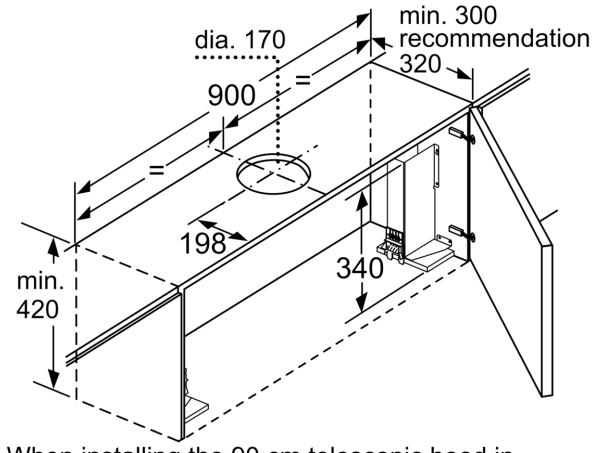


When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.


measurements in mm

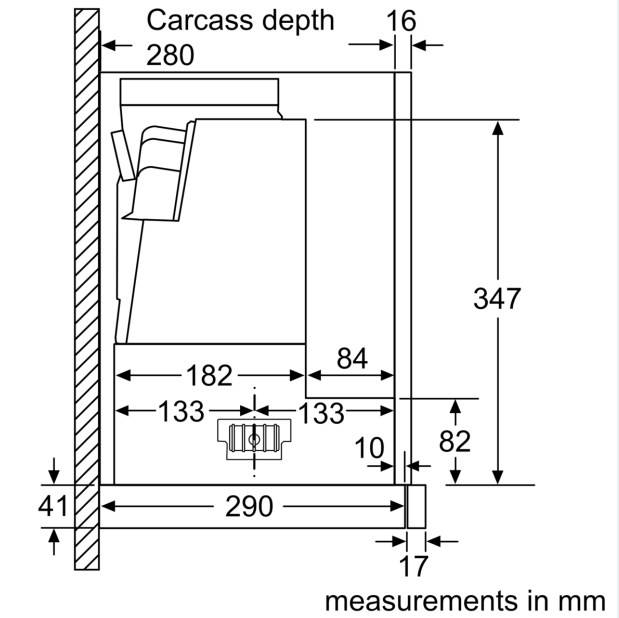



measurements in mm

SIEMENS

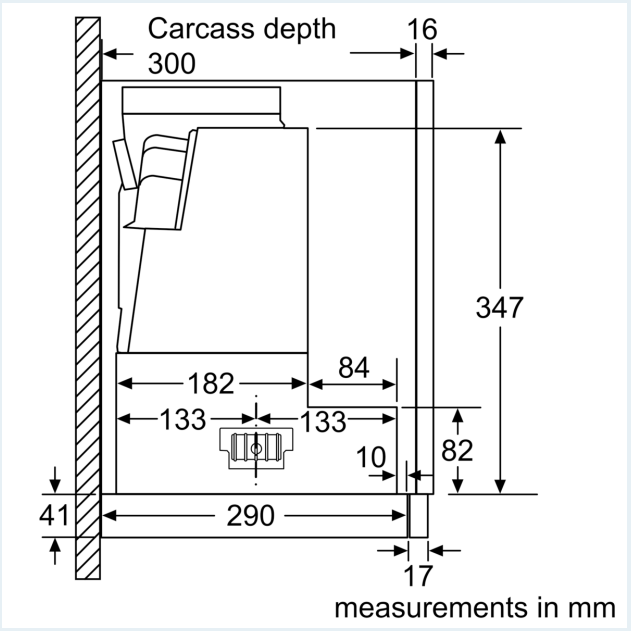
Carcass depth
300
16
347
182
84
133
133
10
82
41
290
17
measurements in mm

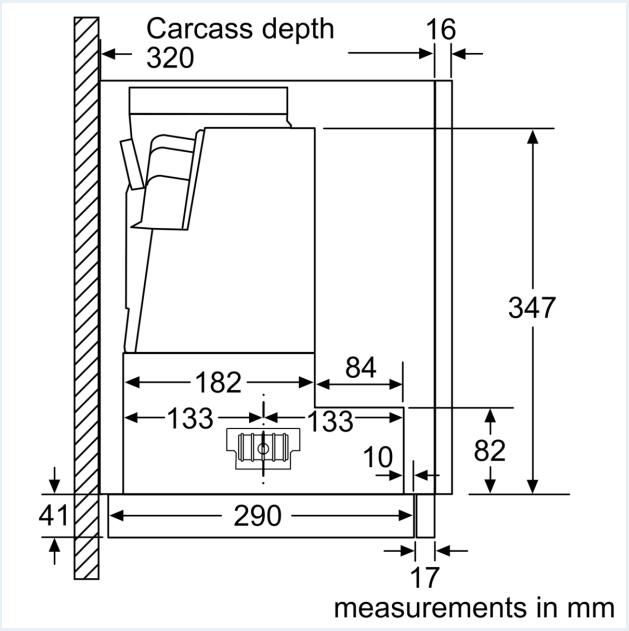
Carcass depth
320
16
347
182
84
133
133
10
82
41
290
17
measurements in mm

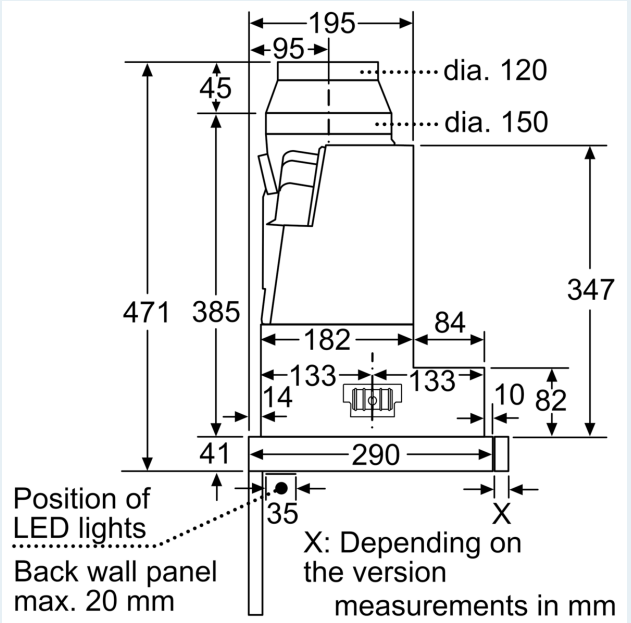
195
95
45
dia. 120
dia. 150
471
385
347
182
84
133
133
14
10
82
41
290
35
X
Position of
LED lights
Back wall panel
max. 20 mm
X: Depending on
the version
measurements in mm

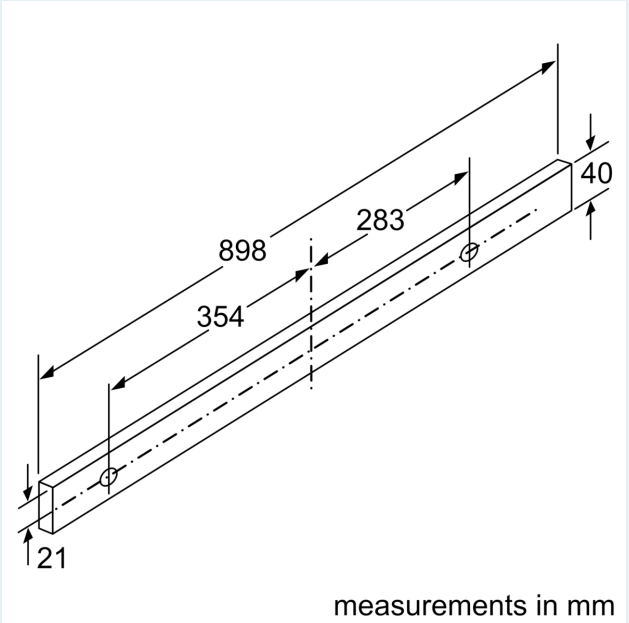
898
283
354
40
21
measurements in mm