Series 6, wall-mounted cooker hood, 60 cm, Stainless Steel
DWB67JP50I





DHZ1225	Chimney extension 1000 mm
DHZ1235	Chimney extension 1500 mm
DWZ0XX0J5	Long Life recirculation kit
DWZ1CB1I4	Clean Air Standard recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DWZ1FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1CX1B4	Clean Air Standard odor filter (repl.)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
HEZG9AS00S	Adapter

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- **Easy-to-clean interior**: hidden screws and cables along with rounded edges make cleaning easy.
- **For fast and effective extraction, the intensive speed setting removes strong kitchen odours quickly and effectively.**

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130.0 cm
Height of the chimney: ..... 582-908/568-1018 mm
Height of product, without chimney: ..... 46 mm
Net weight: ..... 15.0 kg
Type of control: ..... Electronic
Number of speed settings: ..... 3-stage + 2 intensive
Max. air extraction: ..... 414 m^3/h
Boost position output recirculating: ..... 409 m^3/h
Max. air recirculation: ..... 330 m^3/h
Boost position air extraction: ..... 657 m^3/h
Number of lights: 2
Noise level: ..... 61 dB(A) re 1pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable stainless steel
Odour filter: ..... No
Operating Mode: ..... Convertible
Optional accessories: DHZ1225, DHZ1235, DWZ0XX0J5, DWZ1CB1I4, DWZ1CX1I6, DWZ1FX5C6, DWZ1FX5D1, DZZ0XX0P0, DZZ1CX1B4, DZZ1XX1B6, HEZG9AS00S
Type of lamps used: ..... LED
Grease filter type: ..... Multilayer cassette
Connection rating: ..... 143 W
Fuse protection: ..... 10 A
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... India plug (6 Ampere)
Installation typology: ..... Wall-mounted
Material body: ..... Stainless steel
Plug type: ..... India plug (6 Ampere)
Dimensions of the product, with chimney (if exists) (in): ..... x x
Dimensions of the packed product: ..... 23.22 x 25.59 x 26.37
Net weight: ..... 33.000 lbs
Gross weight: ..... 45.000 lbs
Motor location: ..... Integrated motor in hood chimney
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 130.0 cm
Dimensions of the product, with chimney (if exists): ..... 614-1064 x 598.0 x 500.0 mm
Dimensions of the packed product (HxWxD): ..... 590 x 650 x 670 mm
Net weight: ..... 15.0 kg
Gross weight: ..... 20.4 kg
Delay Shut off modes: ..... 10 min

4 242005 195589

Series 6, wall-mounted cooker hood, 60 cm, Stainless Steel
DWB67JP50I

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Design
- Box design
- Wall mounted hood
- Wall hood
- 60 cm stainless steel Box design hood
- Touch control with lightline


Performance
- 3 speeds plus 2 intensive
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use414m³/h
- Intensive657 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use:61 dB(A) re 1 pW (48dB(A) re 20 µPa sound pressure)
- Intensive:71 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Extraction rate in recirculation mode:
- Max. normal use:304m³/h
- Intensive:353 m³/h
- Noise levels in recirculation mode:
- Max. normal use:71 dB(A) re 1 pW (59dB(A) re 20 µPa sound pressure)
- Intensive:74 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)

Comfort
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- easy to clean innerframe
- Light dimmer function
- Softlight with dimmer function
- Efficient BLDC-technology
- 2 x 1.5W LED
- Light Intensity: 267 lux
- Colour Temperature: 3500 K
- Saturation display filter: grease- and charcoal filter
- Steel filter cover
- Steel filter cover, dishwasher safe
- Back-pressure flap: Yes
- Energy Efficiency Class: A
- Average Energy Consumption: 35.3 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Technical information
- Suitable for ducted or recirculating operation only
- Recirculation kit or clean air kit
- Chimney hood wall fixing system
- Dimensions recirculating with CleanAir module (HxWxD):
- 689 x 598 x 500mm - mounting with outer chimney
- 795-1139 x 598 x 500 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 614-954 x 598 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 598 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Total Connected load: 143 W
- Connecting cable 130 cm
- Voltage: 220 - 240 V

* In accordance with the EU-Regulation No 65/2014

Series 6, wall-mounted cooker hood, 60 cm, Stainless Steel
DWB67JP50I

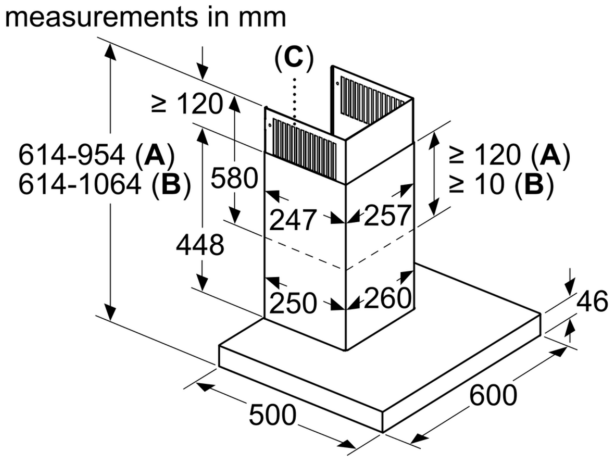

A: Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

