Series 6, wall-mounted cooker hood, 90 cm, Stainless Steel
DWB98JR50I



The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- **PerfectAir sensor**: enjoy quieter, odour-free cooking.
- **Extra quiet**: maximum extractor performance with minimal noise.
- **Easy-to-clean interior**: hidden screws and cables along with rounded edges make cleaning easy.
- **For fast and effective extraction, the intensive speed setting removes strong kitchen odours quickly and effectively.**

DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130.0 cm
Height of the chimney: ..... 582-908/568-1018 mm
Height of product, without chimney: ..... 46 mm
Net weight: ..... 20.4 kg
Type of control: ..... Electronic
Number of speed settings: ..... 3-stage + 2 intensive
Max. air extraction: ..... 430 m^3/h
Boost position output recirculating: ..... 457 m^3/h
Max. air recirculation: ..... 353 m^3/h
Boost position air extraction: ..... 844 m^3/h
Number of lights: 3
Noise level: ..... 55 dB(A) re 1pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable stainless steel
Odour filter: ..... No
Operating Mode: ..... Convertible
Optional accessories: DHZ1223, DHZ1233, DWZ0XX0J5, DWZ1CX1I6, DWZ2CB1I4, DWZ2CX5C6, DWZ2FX5D1, DZZ0XX0P0, DZZ1XX1B6, DZZ2CB1B4
Type of lamps used: ..... LED
Grease filter type: ..... Multilayer cassette
Connection rating: ..... 165 W
Fuse protection: ..... 10 A
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... India plug (6 Ampere)
Installation typology: ..... Wall-mounted
Material body: ..... Stainless steel
Plug type: ..... India plug (6 Ampere)
Dimensions of the product, with chimney (if exists) (in): ..... x x
Dimensions of the packed product: ..... 23.03 x 25.59 x 38.18
Net weight: ..... 45.000 lbs
Gross weight: ..... 59.000 lbs
Motor location: ..... Integrated motor in hood chimney
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 130.0 cm
Dimensions of the product, with chimney (if exists): ..... 614-1064 x 898.0 x 500.0 mm
Dimensions of the packed product (HxWxD): ..... 585 x 650 x 970 mm
Net weight: ..... 20.4 kg
Gross weight: ..... 26.6 kg

4 242005 142675

Series 6, wall-mounted cooker hood, 90 cm, Stainless Steel
DWB98JR50I

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Design
- Box design
- 90 cm stainless steel Box design hood
- Appliance colour: stainless steel
- Touch control with lightline


Performance
- 3 speeds plus 2 intensive
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use430m³/h
- Intensive844 m³/h
- Extraction rate in recirculation mode:
- Max. normal use:371m³/h
- Intensive:513 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use:55 dB(A) re 1 pW (42dB(A) re 20 µPa sound pressure)
- Intensive:69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:
- Max. normal use:67 dB(A) re 1 pW (56dB(A) re 20 µPa sound pressure)
- Intensive:75 dB(A) re 1 pW (61 dB(A) re 20 µPa sound pressure)

Comfort
- Automatic revert setting, 6 minutes
- easy to clean innerframe
- Efficient BLDC-technology
- 3 x 1.5W LED
- Steel filter cover, dishwasher safe
- Back-pressure flap: Yes
- Energy Efficiency Class: A+
- Average Energy Consumption: 30.1 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*


Technical Information
- Suitable for ducted or recirculating operation only
- Recirculation kit or clean air kit
- Chimney hood wall fixing system
- Dimensions recirculating with CleanAir module (HxWxD):
- 689 x 898 x 500mm - mounting with outer chimney
- 795-1139 x 898 x 500 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Total Connected load: 165 W
- Connecting cable 130 cm
- Voltage: 220 - 240 V

* In accordance with the EU-Regulation No 65/2014

Series 6, wall-mounted cooker hood, 90 cm, Stainless Steel
DWB98JR50I

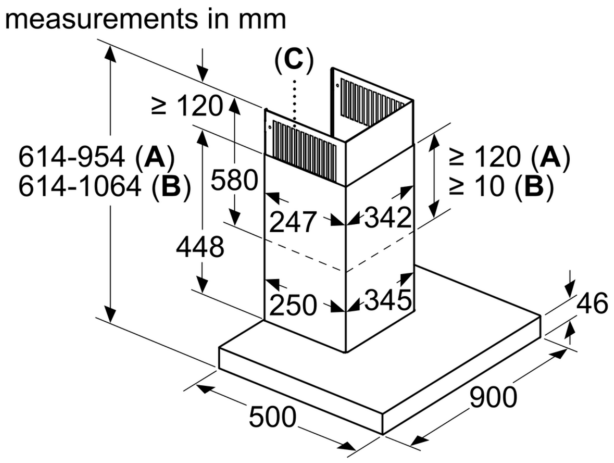


A: Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

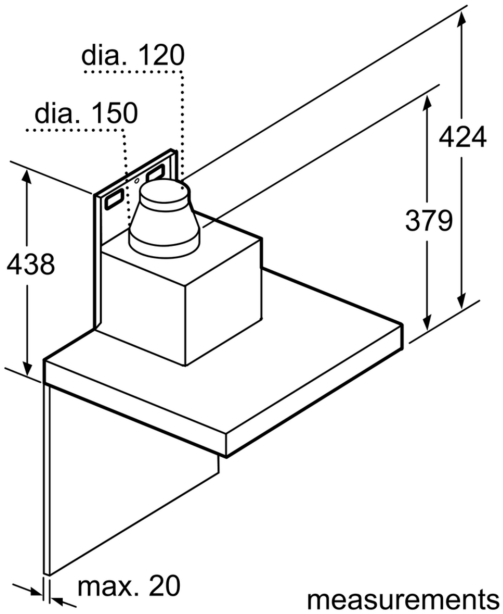

measurements in mm


Measurements in mm

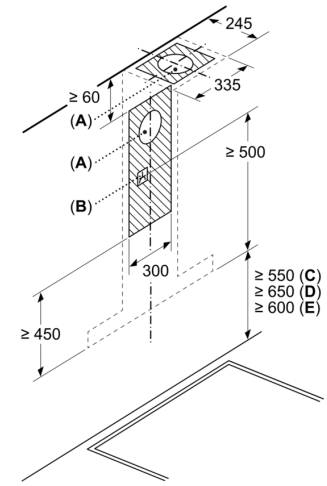

A: Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support

E: Electric - for Australia and New Zealand

Measurements in mm

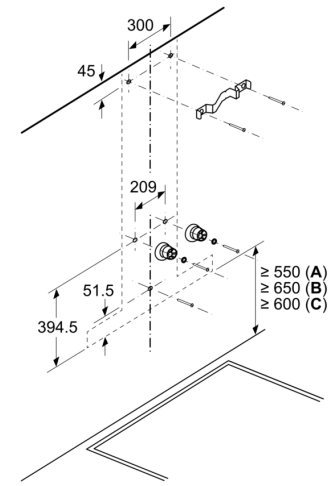

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand