Series 4, wall-mounted cooker hood, 90 cm, Flat black
DWBA98H60I





DWZ3OX6N1 Inner duct cover 320 mm

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Typology: .....Wall-mounted
Length electrical supply cord: ..... 180.0 cm
Height of product, without chimney: .....527 mm
Net weight: .....25.8 kg
Max. air extraction: ..... 730 m^3/h
Number of lights: 2
Noise level: .....67 dB(A) re 1pW
Diameter of air outlet: .....180 mm
Odour filter: ..... No
Operating Mode: ..... Air extraction only
Optional accessories: DWZ3OX6N1
Total power of the lamps: .....3 W
Voltage: .....230 V
Frequency: ..... 50 Hz
Plug type: ..... India plug (6 Ampere)
Installation typology: .....Wall-mounted
Material body: ..... zinc plated
Plug type: ..... India plug (6 Ampere)
Dimensions of the product, with chimney (if exists) (in): .....x x
Dimensions of the packed product: ..... 24.01 x 22.83 x 39.56
Net weight: .....57.000 lbs
Gross weight: ..... 64.000 lbs
Motor location: .....Integrated motor in hood chimney
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 180.0 cm
Dimensions of the product, with chimney (if exists): ....527 x 900.0 x 506.0 mm
Dimensions of the packed product (HxWxD): ... 610 x 580 x 1005 mm
Net weight: .....25.8 kg
Gross weight: ..... 28.9 kg
Delay Shut off modes: .....10 min

4 242005 290987

Series 4, wall-mounted cooker hood, 90 cm, Flat black
DWBA98H60I

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Variant

- Wall mounted hood
- Glass common design

Design

- Touch control with LED

Technical information

- 2 x LED 1,5W
- Suitable for ducted operation only only

Comfort


- Noise min./max. Normal Level: 57/67 dB
- Light Intensity: 71 lux
- Colour Temperature: 8000 K

Dimensions:

- 90 cm flat black Glass common design hood
- Diameter pipe Ø 180 mm (Ø 180 mm enclosed)


Series 4, wall-mounted cooker hood, 90 cm, Flat black
DWBA98H60I

Measurements in mm

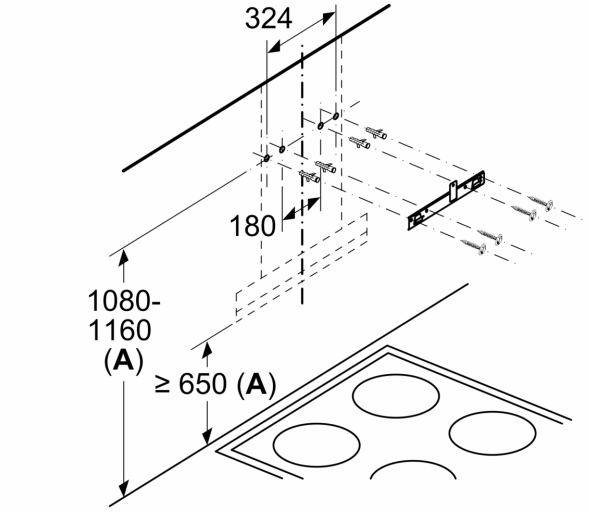

A: From upper edge of pan support

Measurements in mm

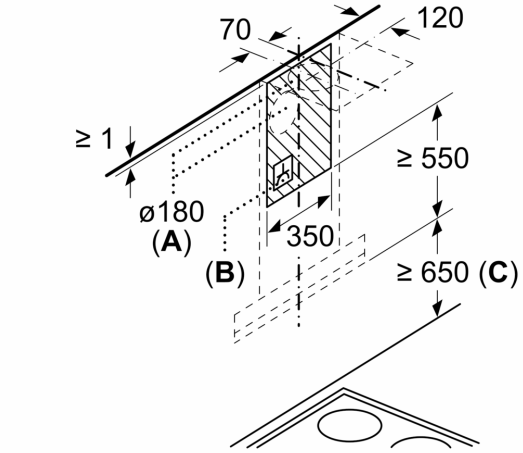

A: Exhaust-air outlet
B: Socket
C: From upper edge of pan support

Measurements in mm

