Series 8, wall-mounted cooker hood, 90 cm, clear glass white printed DWK98PR20I





DWZ0AK0R0	Long Life recirculation kit (chimless)
DWZ0AK0S0	Long Life recirculation kit
DWZ0AX5K0	Chimney extension 1000 mm
DWZ0AX5L0	Chimney extension 1500 mm
DWZ1AK1B6	Clean Air Plus odor filter (replacement)
DWZ1AK1I6	Clean Air Plus recirculation kit
DWZ1AK1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- **PerfectAir sensor**: enjoy quieter, odour-free cooking.
- **Extra quiet**: maximum extractor performance with minimal noise.
- **Easy-to-clean interior**: hidden screws and cables along with rounded edges make cleaning easy.
- **EcoSilence Drive**: the powerful, energy-saving drive for hoods.

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130.0 cm
Height of product, without chimney: ..... 323 mm
Net weight: ..... 26.4 kg
Type of control: ..... Electronic
Number of speed settings: ..... 3-stage + 2 intensive
Max. air extraction: ..... 468 m^3/h
Boost position output recirculating: ..... 460 m^3/h
Max. air recirculation: ..... 378 m^3/h
Boost position air extraction: ..... 837 m^3/h
Number of lights: 2
Noise level: ..... 55 dB(A) re 1pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable aluminium
Odour filter: ..... No
Operating Mode: ..... Convertible
Optional accessories: DWZ0AK0R0, DWZ0AK0S0, DWZ0AX5K0, DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6, DZZ0XX0P0, DZZ1XX1B6
Type of lamps used: ..... LED
Grease filter type: ..... Multilayer cassette
Clean filter reminders: ..... Yes
Connection rating: ..... 166 W
Fuse protection: ..... 10 A
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... India plug (10 Ampere)
Installation typology: ..... Wall-mounted
Plug type: ..... India plug (10 Ampere)
Dimensions of the product, with chimney (if exists) (in): ..... x x
Dimensions of the packed product: ..... 27.16 x 29.13 x 40.94
Net weight: ..... 58.000 lbs
Gross weight: ..... 77.000 lbs
Motor location: ..... Integrated motor in hood body
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 130.0 cm
Dimensions of the product, with chimney (if exists): .... 480 x 894.0 x 548.0 mm
Dimensions of the packed product (HxWxD): ... 690 x 740 x 1040 mm
Net weight: ..... 26.4 kg
Gross weight: ..... 35.1 kg

4 242005 288656

Series 8, wall-mounted cooker hood, 90 cm, clear glass white printed DWK98PR20I

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Variant

- DWK98PR20I white
- Wall mounted hood
- Inclined glass brand design

Design

- white Inclined glass brand design
- Touch control with lightline
- Steel filter cover, dishwasher safe

Technical information

- 3 speeds plus 2 intensive
- Maximum extraction power 488 m^3/h (freeblowing)
- 2 x LM5-01_LED_3W
- Suitable for ducted or recirculating operation only
- Recirculation kit or clean air kit

Comfort


- Noise min./max. Normal Level: 43/55 dB
- Light Intensity: 519 lux
- Colour Temperature: 3500 K

Dimensions:

- 90 cm white Inclined glass brand design hood
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Dimensions recirculating (HxWxD): 1017-1287 x 894 x 548 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

Series 8, wall-mounted cooker hood, 90 cm, clear glass white printed
DWK98PR20I


Measurements in mm

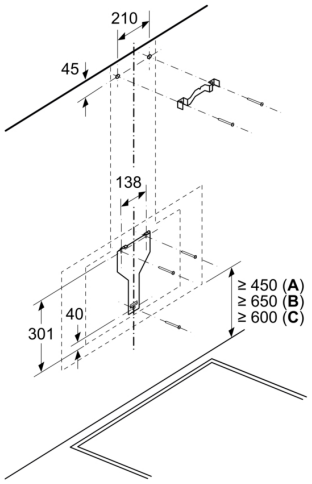

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

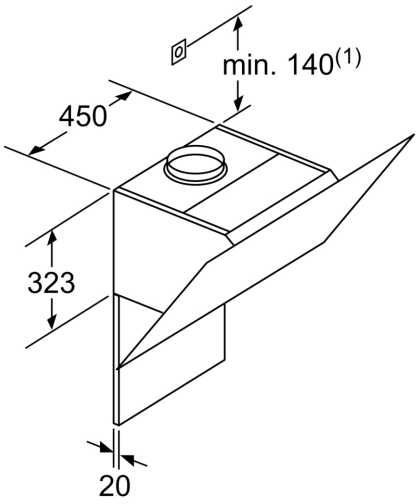


(1)Position of socket

Note the maximum thickness of the back panel.

measurements in mm


Measurements in mm

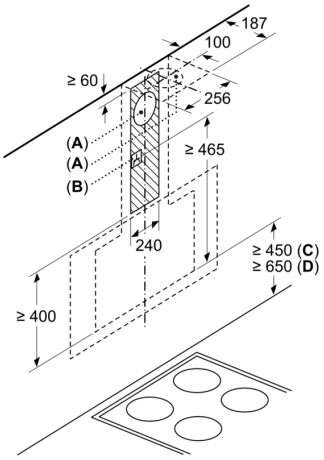

A: Exhaust air
B: Socket


From upper edge of pan support

C: Electric
D: Gas

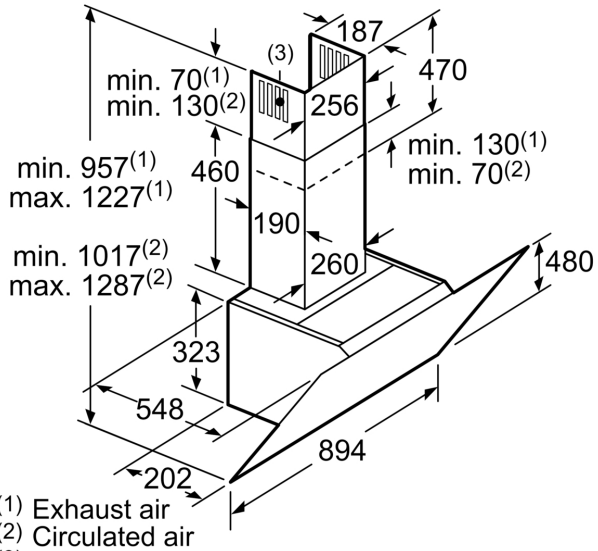


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down

measurements in mm

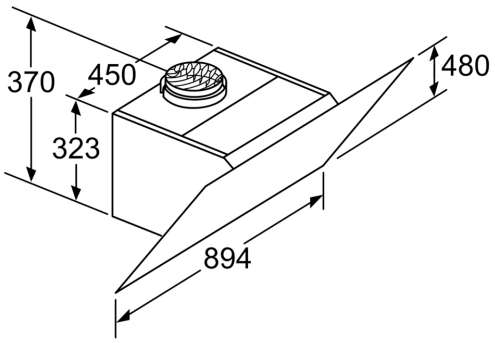

Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

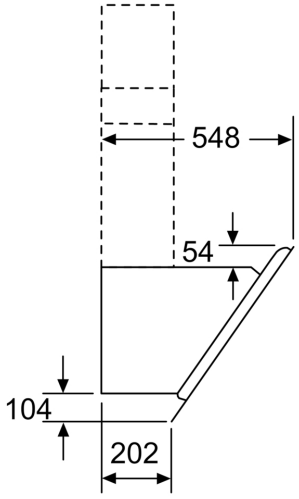

measurements in mm