Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60I





Inclined hood: optimal for keeping an eye on your pots and pans.

- **PerfectAir sensor**: enjoy quieter, odour-free cooking.
- **For fast and effective extraction, the intensive speed setting removes strong kitchen odours quickly and effectively.**
- **Extra quiet: maximum extractor performance with minimal noise.**

DWZ0AK0R0	Long Life recirculation kit (chimless)
DWZ0AK0S0	Long Life recirculation kit
DWZ0AX5K0	Chimney extension 1000 mm
DWZ0AX5L0	Chimney extension 1500 mm
DWZ1AK1B6	Clean Air Plus odor filter (replacement)
DWZ1AK1I6	Clean Air Plus recirculation kit
DWZ1AK1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DWZ1AX6E1	Chimney standard black
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130.0 cm
Height of product, without chimney: ..... 323 mm
Net weight: ..... 26.4 kg
Type of control: ..... Electronic
Number of speed settings: ..... 3-stage + 2 intensive
Max. air extraction: ..... 468 m^3/h
Boost position output recirculating: ..... 460 m^3/h
Max. air recirculation: ..... 378 m^3/h
Boost position air extraction: ..... 837 m^3/h
Number of lights: 2
Noise level: ..... 55 dB(A) re 1pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable aluminium
Odour filter: ..... No
Operating Mode: ..... Convertible
Optional accessories: DWZ0AK0R0, DWZ0AK0S0, DWZ0AX5K0, DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6, DWZ1AX6E1, DZZ0XX0P0, DZZ1XX1B6
Type of lamps used: ..... LED
Grease filter type: ..... Multilayer cassette
Connection rating: ..... 150 W
Fuse protection: ..... 10 A
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... India plug (6 Ampere)
Installation typology: ..... Wall-mounted
Plug type: ..... India plug (6 Ampere)
Dimensions of the product, with chimney (if exists) (in): ..... x x
Dimensions of the packed product: ..... 27.16 x 29.13 x 40.94
Net weight: ..... 58.000 lbs
Gross weight: ..... 77.000 lbs
Motor location: ..... Integrated motor in hood body
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 130.0 cm
Dimensions of the product, with chimney (if exists): .... 480 x 894.0 x 548.0 mm
Dimensions of the packed product (HxWxD): ... 690 x 740 x 1040 mm
Net weight: ..... 26.4 kg
Gross weight: ..... 35.1 kg

4 242005 157679

Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60I

Inclined hood: optimal for keeping an eye on your pots and pans.

Design
- Wall mounted hood
- 90 cm wide
- Black glass
- Touch control with lightline

Performance
- 3 speeds plus 2 intensive
- 2 capture areas: front side and bottom side
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use467m³/h
- Intensive837 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use:55 dB(A) re 1 pW (42dB(A) re 20 µPa sound pressure)
- Intensive:67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Extraction rate in recirculation mode:
- Max. normal use:459m³/h
- Intensive:703 m³/h

Comfort
- Cooktop-based hood control
- (with matching cooktop)
- PowerBoost position
- Automatic 10 minutes after running
- Automatic revert setting, 6 minutes
- Easy to clean Innerframe
- Air quality sensor
- Light dimmer function
- Efficient BLDC-technology
- RimVentilation
- Saturation display filter: grease- and charcoal filter
- Steel filter cover, dishwasher safe


Technical Information
- Suitable for ducted or recirculating operation only
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recurculation kit (accessory) is needed
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Dimensions recirculating, chimney (HxWxD): 1017-1287 x 894 x 548 mm
- Dimensions recirculating, chimless (HxWxD): 480 mm x 894 x 548 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1147 x 894 x 548mm - mounting with outer chimney
- 1217-1487 x 894 x 548 mm - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Power rating: 150 W
- India plug type

Remote Monitoring and Control (only in countries where Home Connect service is available)
- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Wall fixing inclined/flat/cube
- None, Cooktop-based hood control
- Total Connected load: 150 W

* In accordance with the EU-Regulation No 65/2014

Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed
DWK98PR60I


Measurements in mm

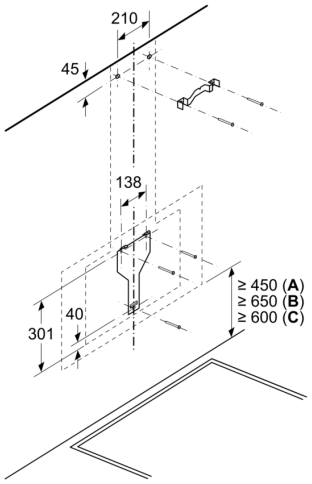

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

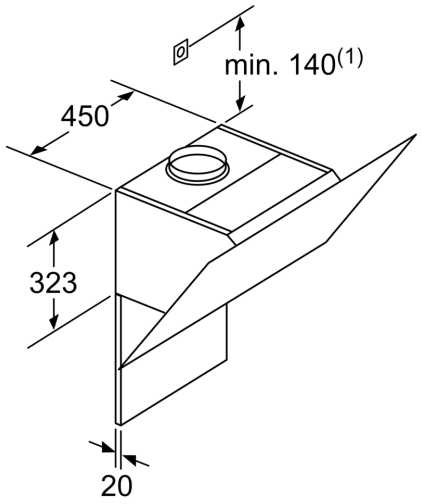


(1)Position of socket

Note the maximum thickness of the back panel.

measurements in mm


Measurements in mm

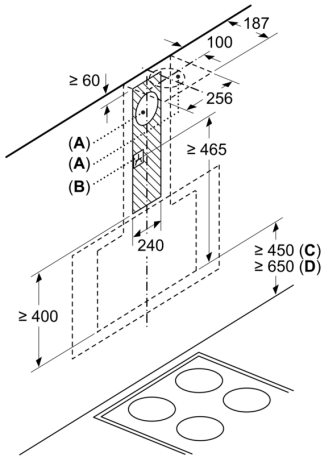

A: Exhaust air
B: Socket


From upper edge of pan support

C: Electric
D: Gas

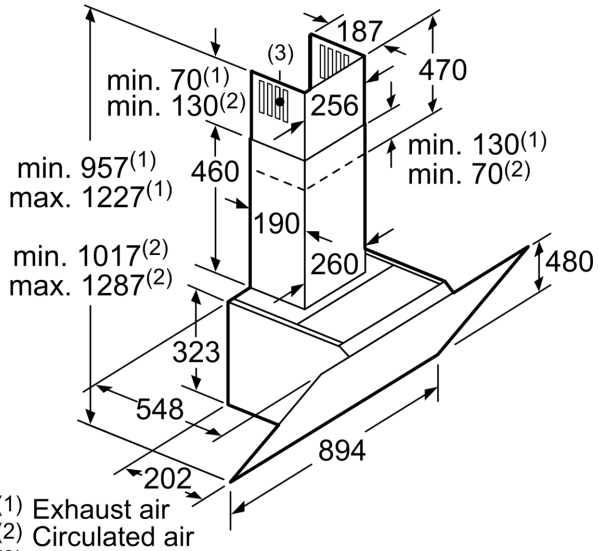


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down

measurements in mm

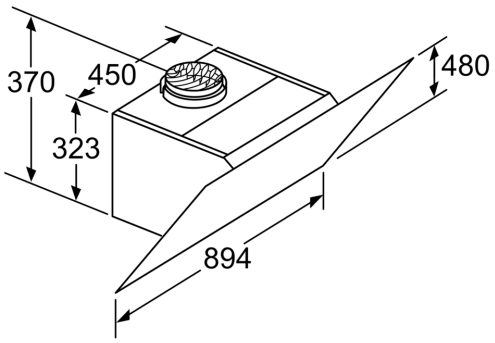

Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

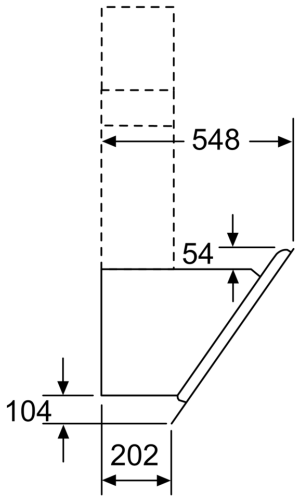

measurements in mm