
Series 8, Induction hob with integrated ventilation system, 80 cm, surface mount with frame
PXX875D67E



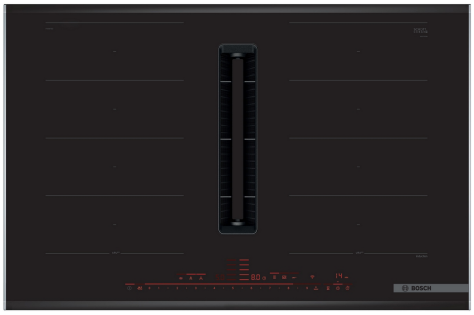

- **Power Boost**: up to 35% faster heating compared to highest power level.
- **Restart**: restores hob settings in case of an unintentional hob switch-off.
- **Timer with switch-off function**: turns off the assigned cooking zone after the set time.

Product name/family: ..... Cooking zone ceramic
Built-in / Free-standing: ..... Built-in
Energy input: .....Electric
Total number of positions that can be used at the same time: 4
Min. required niche size for installation (HxWxD): ....223 x 750-750 x 490-490 mm
Width of the appliance: .....816 mm
Dimensions: ..... 223x816x527 mm
Dimensions of the packed product (HxWxD): ..... 430 x 940 x 660 mm
Net weight: .....27.0 kg
Gross weight: ..... 33.4 kg
Residual heat indicator: ..... Separate
Location of control panel: ..... Front
Basic surface material: .....Ceramic
Color of surface: .....Black, Stainless steel
Color of frame: .....Stainless steel
Length electrical supply cord: ..... 110.0 cm
Sealed Burners: ..... No
Heating with booster: ..... All
Power of 2nd heating element (kW): .....3.3 kW
Max. air extraction: ..... 500 m^3/h
Boost position output recirculating: .....595.0 m^3/h
Max. air recirculation: ..... 499 m^3/h
Boost position air extraction: ..... 622 m^3/h
Noise level: .....69 dB(A) re 1pW
Odour filter: ..... No
Operating Mode: .....Convertible
Clean filter reminders: .....Yes
Voltage: .....220-240/380-415 V
Frequency: ..... 50-60 Hz
Included accessories: 1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

---

4 242005 192540


---

1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter


HEZ32WA00 Wireless food thermometer, HEZ390011 Stainless Steel roaster with glas lid, HEZ390012 Steaming Rack for Stainless Steel roaste, HEZ39050 Wireless temperature sensor for cooktop, HEZ390512 Teppan Yaki (large), HEZ390522 Griddle Plate, HEZ9CF240 Fry pan, coated 24cm Ø, HEZ9CF280 Fry pan, coated 28cm Ø, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9FF010 Flex Pan, large, HEZ9FF030 Flex Pan set, 3 pcs., HEZ9FF040 Flex Pan set, 4 pcs., HEZ9SE030 Set of 2 pots and 1 pan, HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9TY010 Teppan Yaki, HEZ9VDKE1 Exhaust kit, HEZ9VDKR0 Recirculation kit 2 L-bow (70cm), HEZ9VDKR1 Recirculation kit S and L-bow (60cm), HEZ9VDKR2 Recirculation kit 1x L-bow, HEZ9VDSB1 90° flat duct bend horizontal, HEZ9VDSB2 90° flat duct L vertical, HEZ9VDSB3 90° flat duct M vertical, HEZ9VDSB4 90° flat duct S vertical, HEZ9VDSI0 Adapter round-flat, HEZ9VDSI1 90° Adapter round-flat, HEZ9VDSM1 Straight tube 500mm, HEZ9VDSM2 Straight tube 1000mm, HEZ9VDSS1 Connector sleeve (female), HEZ9VDSS2 Flex sleeve (female), HEZ9VEDU0 Acoustics Filter, HEZ9VRCR1 Clean Air Plus odor filter (replacement), HEZ9VRPD1 Plinth Diffusor

Series 8, Induction hob with integrated ventilation system, 80 cm, surface mount with frame
PXX875D67E

measurements in mm

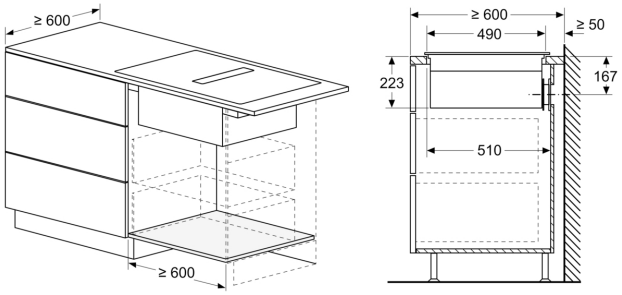


measurements in mm

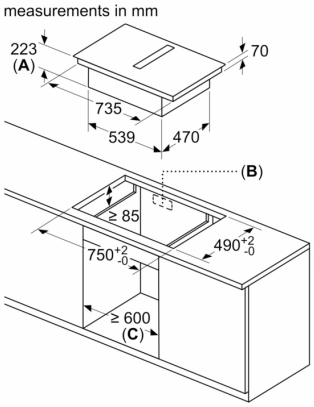

A: Recess depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80 cm width class models can be installed in 60 cm wide furniture by adjusting the side panels.

Measurements in mm

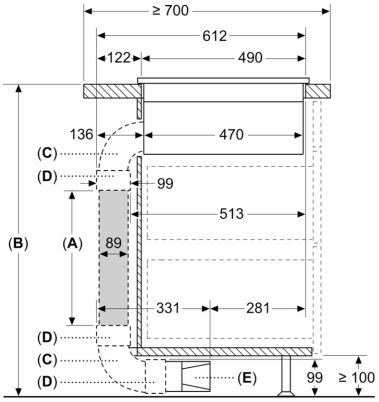


A: Tube length
B: Kitchen height
C: 90° L-size bow
D: Connector sleeve
E: Diffusor

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 960
1000	> 960

Measurements in mm

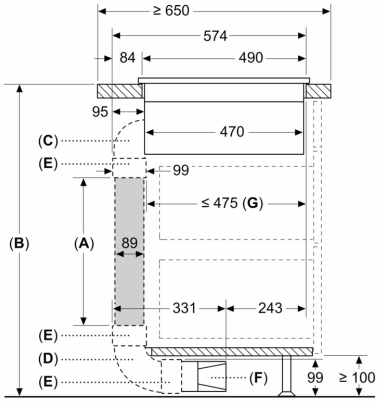


A: Tube length
B: Kitchen height
C: 90° M-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 940
1000	> 940

Measurements in mm

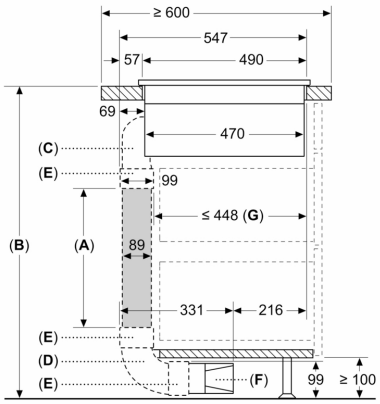


A: Tube length
B: Kitchen height
C: 90° S-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

Ducting kit available for ≥ 600 mm depth worktops and up to 960 mm height


The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 990
1000	> 990


measurements in mm

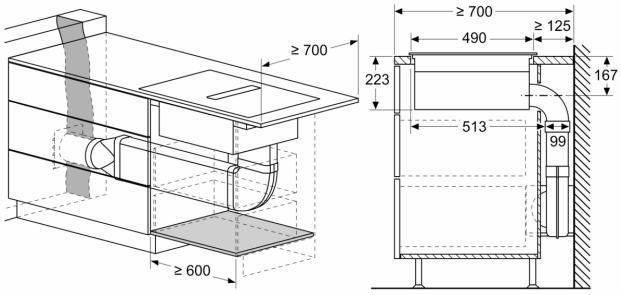


measurements in mm

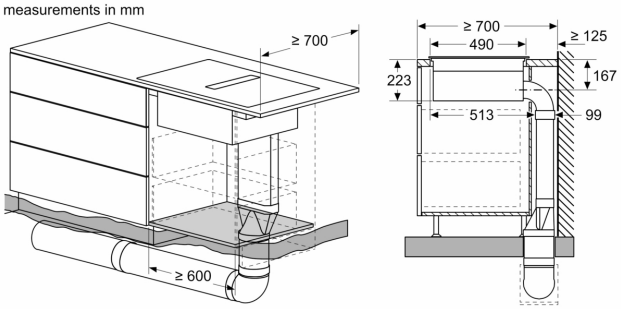


measurements in mm

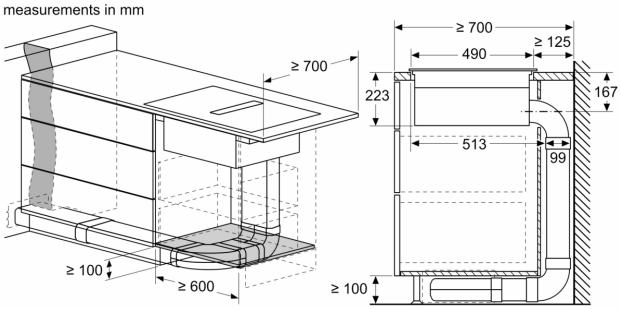


measurements in mm

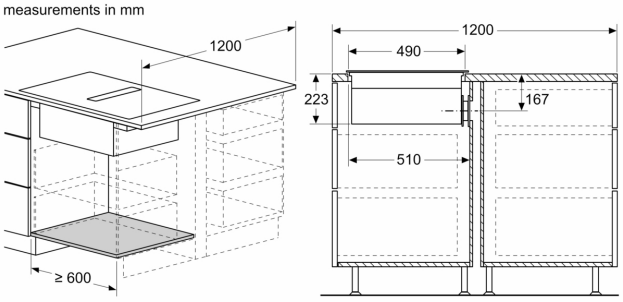

measurements in mm

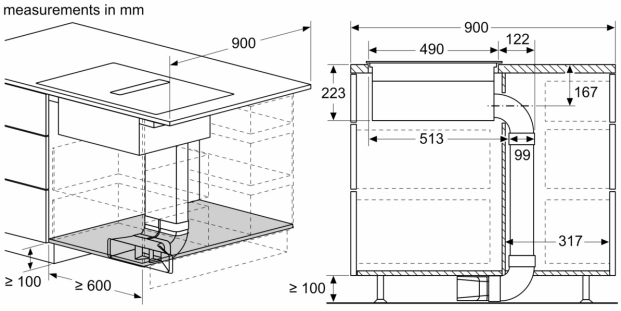


Measurements in mm

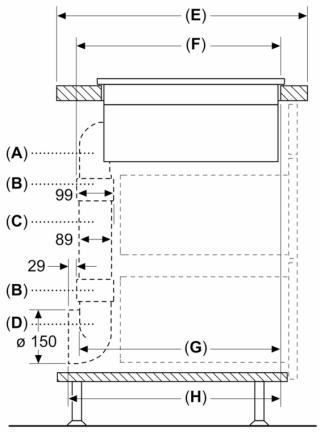

A	E	F	G	H
S-size	≥ 600	547	545	579
M-size	≥ 650	574	569	603
L-size	≥ 700	612	609	643

A: 90° Bow
B: Connector sleeve
C: Straight tube
D: 90° Adapter round–flat


Measurements in mm

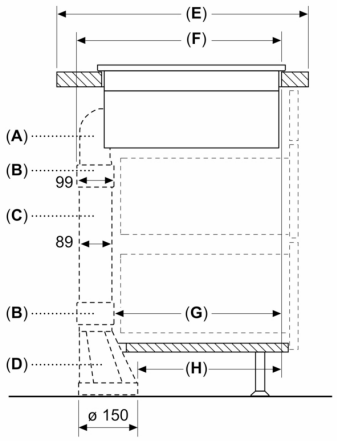

A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453


A: 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

Measurements in mm

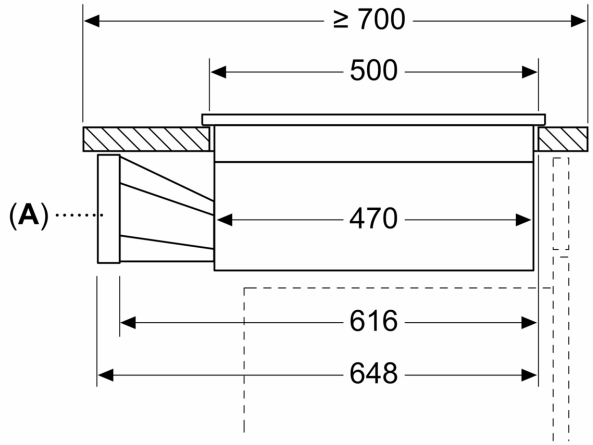


A: Adapter round-flat

measurements in mm

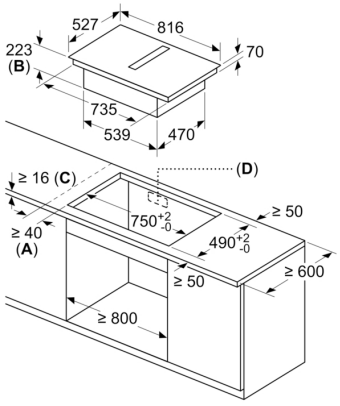


A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

measurements in mm
Front view

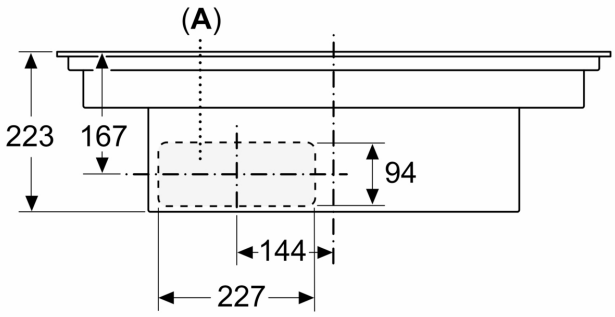


measurements in mm
Front view – unit cut-out
for unducted recirculation

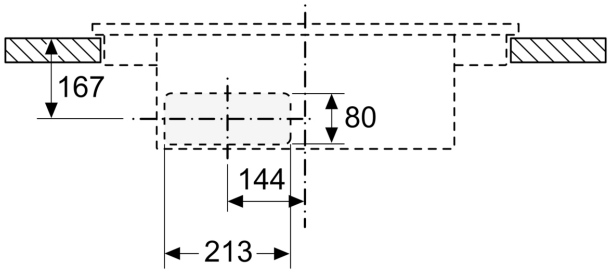

A: Connected directly at the rear

measurements in mm
Side view



When installing directly against outer walls that are not insulated (μ ≥ 0.5 W/m² °C), we recommend using partially or fully ducted recirculation configurations.

measurements in mm
Front view

